

CMB-40-LD



40 GHz Compact Modulator with Bias Control, Low Drive


The Optilab CMB-40-LD is a Compact Modulator Board designed for analog photonics applications from DC to 40 GHz. This unit includes a compact optical intensity modulator and an Automatic Bias Control (ABC) board. The external laser source of CMB modules are typically DFB lasers. CMB series is an ideal solution for high density RFoF sub-system integration. Contact Optilab for more information.

Features

- 40 GHz operational bandwidth
- Low drive voltage: 2.5 V @ 10 GHz typ.
- Compact and low power consumption
- 1520 nm to 1610 nm wavelength range
- Automatic Bias Control
- Accepts external laser source via input
- Customizable options:
 - PM Output
 - Temperature Qualified (-55 °C to +75 °C)

Functional Diagram Applications

- Analog photonics
- 40 GHz RFoF transmission
- RF/IF signal distribution
- Satellite communication
- Optical communications to 43 Gb/s
- Multi-channel RFoF system

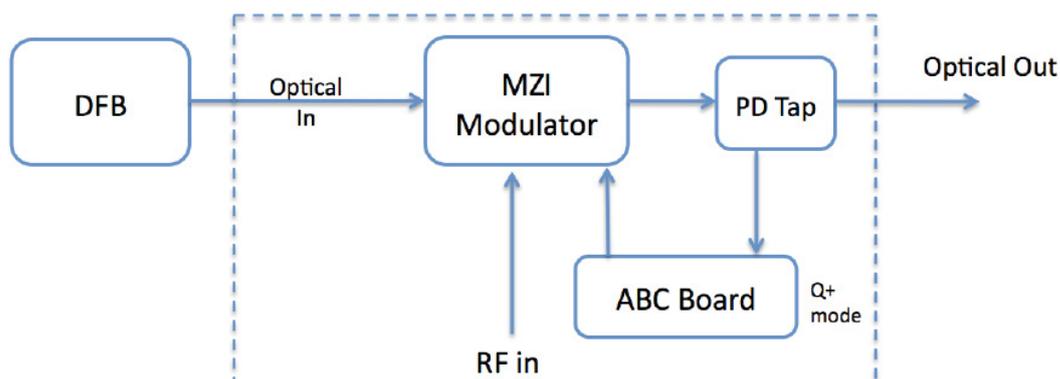

40 GHz Compact Modulator with Bias Control, Low Drive

OPTIONS

CMB-40-LD-XX-YY

XX **PM:** Polarization Maintaining

YY **TQ:** Temperature Qualified

TECHNICAL INFO

For technical info and support:

sales@optilab.com

www.optilab.com

WEB ORDER

To order, please click below.



Optilab Advantage

- Innovation
- Performance
- Quality
- Customization
- Warranty



General Specifications	
Operating Wavelength	1520 nm to 1610 nm
Laser Source	User's external Input
Optical Input Level	+18 dBm max.
RF Return Loss	>15 dB @ 10 GHz; >10 dB @ 30 GHz
Impedance	50 Ω
Operating Frequency Range	DC to 40 GHz
Input RF Voltage	26 dBm max.
Optical Output Level	7 dBm @ +14 dBm input typ.
S21 Bandwidth	3 dB, 33 GHz typ.
Modulator Bias Mode	Q+ for linear operation
Extinction Ratio	25 dB typ.;
Modulator Voltage V_{PI}	2.5 V typ. @ 10 GHz; 4.3 V typ. @ 30 GHz
Analog Link Performance	
IIP3 @7 GHz	29 dBm typ.
1 dB Compression Point @10 GHz	14.5 dBm typ.
Mechanical Specifications	
Operating Temperature (standard)	-30 °C to +60 °C
Operating Temperature (TQ version)	-55 °C to +75 °C
Storage Temperature	-60 °C to +90 °C
Power Supply Requirements	5V, 500 mA max.
Optical Connectors	FC/APC
Fiber Type	>1m, PANDA input, SMF-28 output; PANDA input/output (PM version)
RF Input Connector	GPPO; GPPO to K adaptor available
Electrical Connector	6 Pin, 5 volt supply and RS485
Remote Control	Software command via RS485
Alarm	LED bias mode status
Dimensions	140 mm x 28 mm x 19.5 mm

Electrical Connector Pin Out



Pin	Description
1	GND
2	NC
3	D- for RS485
4	D+ for RS485
5	GND
6	+5V power supply

40 GHz Compact Modulator with Bias Control, Low Drive

Typical S21 and S11 Bandwidth

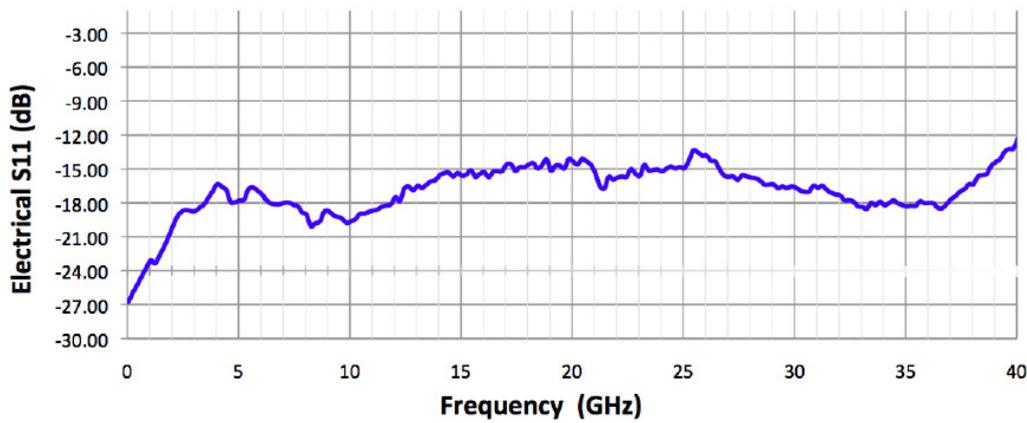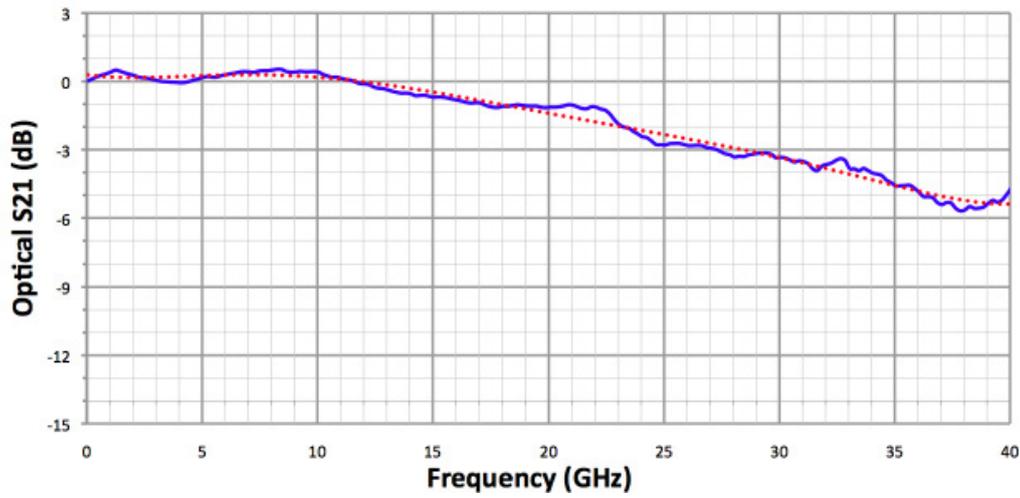

Mechanical Drawing

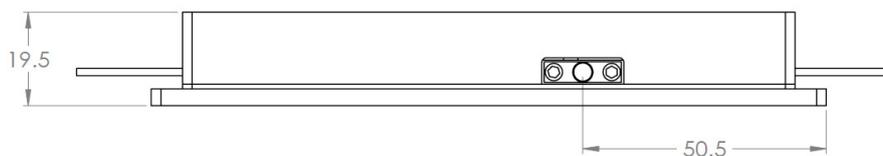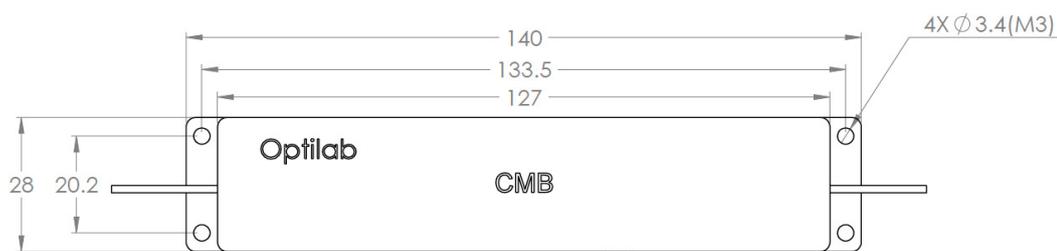

Unit: mm